



All-new ZF Lifeguard transmission lubricants.

Introducing the new range of ZF Lifeguard lubricants for Asian vehicle transmissions. Original equipment know-how for maximized performance. Engineered by ZF transmission specialists.

- Prevent transmission failures and malfunctions
- Maintain the smoothest possible gear shift
- Reduce wear on components subjected to a high level of stress
- Extend the transmission's service life
- Access 100% compatibility, thanks to ZF OE know-how.

Affordable. Efficient. Quality.



ZF LifeguardFluid AG+


ZF LifeguardFluid AG+ is specially formulated fluid designed to meet the requirements of a wide range of Automatic Transmission. It conforms to Specifications requiring SP-II, SP-III, DEXRON III, MERCON V, Allison C-4, Toyota T-III and IV. In addition, it meets the requirements of European OEM's like ZF-TE-ML-14A, Voith 55.6335, MAN 339 Type Z-1.

Performance and advantages:

- Excellent friction performance to ensure stability
- Advanced performance with high efficiency
- Enhanced high shear stability
- Oxidation and thermal stability
- Protection against gear shudder.

Reference No.: DEXRON III | ALLISON C-4 | JASO M315 Type

IA P/N: 5961.308.712 1L | 5961.308.713 4L

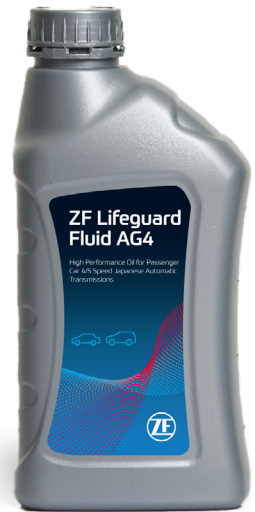

ZF LifeguardFluid AG6

ZF LifeguardFluid AG6 is formulated with synthetic technology base oil and advanced high performance additives, and meets or exceeds the stringent requirements of General Motors' DEXRON®-VI specification. It also meets the requirements of latest OEM specifications such as Toyota, Hyundai/Kia, MB and VW. It is also suitable for most modern 6+ speed automatic transmissions.

Performance and advantages:

- Improved oxidation and thermal stability
- Improved anti-wear protection
- Enhanced high shear stability
- Improved shear stability and frictional durability
- Outstanding low temperature performance.

Reference No.: GM 93735412 | JASO 1A-LV | Toyota ATF WS | Honda-ATF DW-1

P/N: 5961.308.715 1L | 5961.308.716 4L



ZF LifeguardFluid CVT


ZF LifeguardFluid CVT is specially formulated to provide excellent driving comfort, extended service interval, longer life of transmission, excellent wear control. recommended for Audi Multitronic, BMW Mini CVT, Honda CVT. It is a premium quality transmission fluid designed to meet the service fill use in a broad range of Continuously Variable Transmissions (CVT).

Performance and advantages:

- Constant friction properties over lifetime on variator system
- Enable reliable transmission of maximum traction
- Outstanding resistance to oxidative and thermal
- Excellent shear stability.

Reference No.: Mini Cooper EZL 799A/ 83220136376/ 83220429154 | Chrysler NS-2
Hyundai/Kia CVT-1/ SP III | Toyota CVTF TC, CVTF FE | Nissan NS-1, NS-2, NS-3
Honda HMMF*, HCF2 | Mazda JWS 3320 | Mitsubishi CVTF-J1, SP-III

P/N: 5961.308.718 1L / 5961.308.719 4L

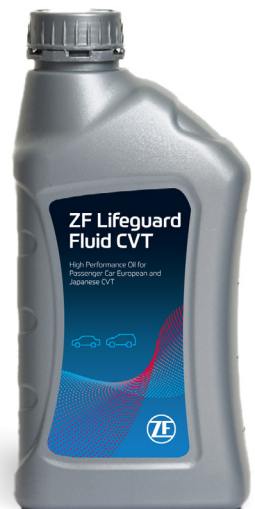

For more information contact us at:

ZF Asia Pacific Pte. Ltd. • 11 Tuas Drive 1 • Singapore 638678 • Phone: +65 6424 8787

ZF LifeguardFluid MTH

ZF Lifeguard Fluid MTH conforms to GL-5, 80W-90 standard. This is a high-performance automotive gear oil specially formulated from good quality base oil and contains high EP additive for heavy duty conditions with excellent gear protection, longer oil drain interval and transmission life. This product provides for manual transmission, gearboxes and hypoid gear axles that present conditions of light to moderate load applications.

Performance and advantages:

- Outstanding pitting, scuffing and wear protection.
- Excellent rust and corrosion protection.
- Effective low temperature lubrication.
- Good protection under high speed/shock load, high speed/low torque and low speed/high torque.
- Good in thermal and oxidation stability.

Reference No: API GL-5, SAE 80W-90

P/N: 5961.309.108 1L | 5961.309.109 4L

ZF LifeguardFluid MTA

ZF Lifeguard Fluid MTA conforms to GL-5, 85W-140 standard. This is a high-performance automotive gear oil formulated from high quality base oil and contains high EP additive for heavy duty conditions with excellent gear protection, longer oil drain interval and transmission life. This higher viscosity product provides for manual transmission, gearboxes and hypoid gear axles that presenting conditions of moderate to heavy load applications.

Performance and advantages:

- Outstanding pitting, scuffing and wear protection.
- Excellent rust and corrosion protection.
- Effective low temperature lubrication.
- Good protection under high speed/shock load, high speed/low torque and low speed/high torque.
- Good in thermal and oxidation stability.

Reference No: API GL-5, SAE 85W-140

P/N: 5961.309.110 1L | 5961.309.111 4L

ZF LifeguardFluid MTS

ZF Lifeguard Fluid MTS conforms to GL-4, 80W-90 standard. This is a high-quality automotive gear lubricant, formulated from high quality base oils and specially selected additives for mild extreme pressure. This product provides for automotive manual gearboxes, transmission, axles and final drives that presenting conditions of medium severity.

Performance and advantages:

- Provide extreme pressure to protect scuffing and wear in hypoid and other types of gear.
- Excellent rust and corrosion protection.
- Effective low temperature lubrication.
- Good protection under high speed/low torque and low speed/high torque.
- Good in thermal and oxidation stability.

Reference No: API GL-4, SAE 80W-90

P/N: 5961.309.118 1L | 5961.309.119 4L

For more information contact us at:

ZF Asia Pacific Pte. Ltd. • 11 Tuas Drive 1 • Singapore 638678 • Phone: +65 6424 8787

ZF LifeguardFluid MTH-LSD

ZF Lifeguard Fluid MTH-LSD conforms to GL-5, 80W-90 standard. This is a high performance limited-slip differential automotive gear oil formulated from high quality base oil and contains high EP additive for heavy duty conditions with excellent gear protection, longer oil drain interval and transmission life. This product provides for the lubrication of axles equipped with limited slip differential (LSD) and hypoid gear axles that presenting conditions of moderate to heavily load applications.

Performance and advantages:

- Outstanding pitting, scuffing and wear protection.
- Excellent rust and corrosion protection.
- Effective low temperature lubrication.
- Good protection under high speed/shock load, high speed/low torque and low speed/high torque.
- Good in thermal and oxidation stability.
- Prevent clutch-slip for excellent performance in LSD.
- Good protection extreme pressure properties and strong oil film thickness and excellent protection gear under heavy duty usage.

Reference No: API GL-4, SAE 80W-90

P/N: 5961.309.112 1L | 5961.309.113 4L

ZF LifeguardFluid MTV

ZF Lifeguard Fluid MTV conforms to GL-4, 75W-90 standard. This is an excellent quality automotive gear lubricant, formulated from high quality base oils and specially selected additives for mild extreme pressure. This product provides for lubrication of automotive manual gearboxes, transmission, axles and final drives that presenting conditions of medium severity.

Performance and advantages:

- Provide extreme pressure to protect scuffing and wear in hypoid and other types of gear.
- Excellent rust and corrosion protection.
- Effective low temperature lubrication.
- Good protection under high speed/low torque and low speed/high torque.
- Good in thermal and oxidation stability.

Reference No: API GL-4, SAE 75W-90

P/N: 5961.309.114 1L | 5961.309.115 4L

For more information contact us at:

ZF Asia Pacific Pte. Ltd. • 11 Tuas Drive 1 • Singapore 638678 • Phone: +65 6424 8787