



Sl. 1: Osigurač sa bajonetnim zatvaračem



Sl. 2: Osigurač sa plastičnim zatvaračem

Potezne sajle sa automatskim regulacionim mehanizmom osigurane su bajonetnim zatvaračem (sl. 1) ili belom plastičnom trakom (sl. 2).


### Potezna sajla sa bajonetnim zatvaračem

1. Ugradite poteznu sajlu.
2. Otpustite osigurač (bajonetni zatvarač).
3. Skinite osigurač (bajonetni zatvarač).

→ Potezna sajla se nakon pritiska na papučicu kvačila automatski podešava.



Sl. 3: Otpušten osigurač

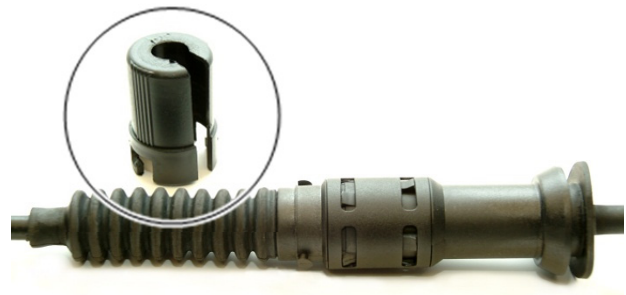

Sl. 4: Uklonjen osigurač

### Potezna sajla sa plastičnom trakom

1. Ugradite poteznu sajlu.
2. Ugradite poteznu sajlu.
3. Otpustite osigurač (plastičnu traku).

→ Potezna sajla se nakon pritiska na papučicu kvačila automatski podešava.



Sl. 5: Otpušten osigurač



[www.zf.com/serviceinformation](http://www.zf.com/serviceinformation)