



CITROËN C5 III (RD\_), C5 III Break (RW\_)



### **WARNING**

**Health risk!**

**Inhalation of brake dusts may result in serious damage to the respiratory organs!**

**Do not clean brake components with compressed air.**

**Use brake cleaner fluid.**

### **NOTE**

**Activate the parking brake service mode before starting to work on the brake system.**

**The illustrations of these installation instructions are exemplary and are only intended for better understanding.**

### **General reference notes**


The control unit with the parking brake servomotor is located on the underbody.

The switch for the parking brake is located in the center console.

**(1)**

**(see figure 1)**

**Figure 1**

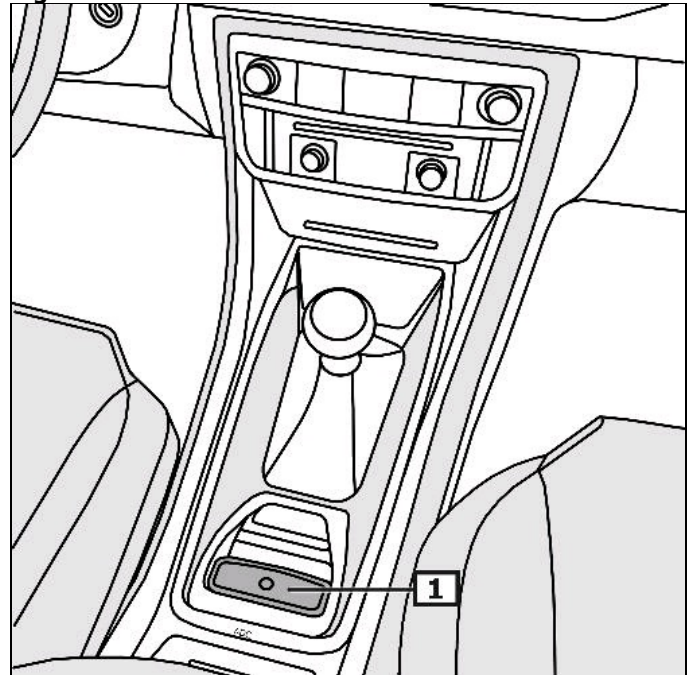

**1 Parking brake switch**

## **Display/operation**

### **Automatic mode**

The parking brake is automatically actuated after the engine has been cut with the vehicle being stationary.  
The parking brake releases automatically as soon as the vehicle is being driven in the 1st gear or when reversing.

### **Engage parking brake**

*Pull parking brake switch.*

### **Disengage parking brake**

*Press parking brake switch downward.*

The yellow indicator light goes on when errors occur that impair operating or traffic safety. **(2)**


The indicator light indicates the deactivated automatic mode.

**(3)**

**(see figure 2)**

**For further details and information, please refer to the operating manual!**

**Figure 2**

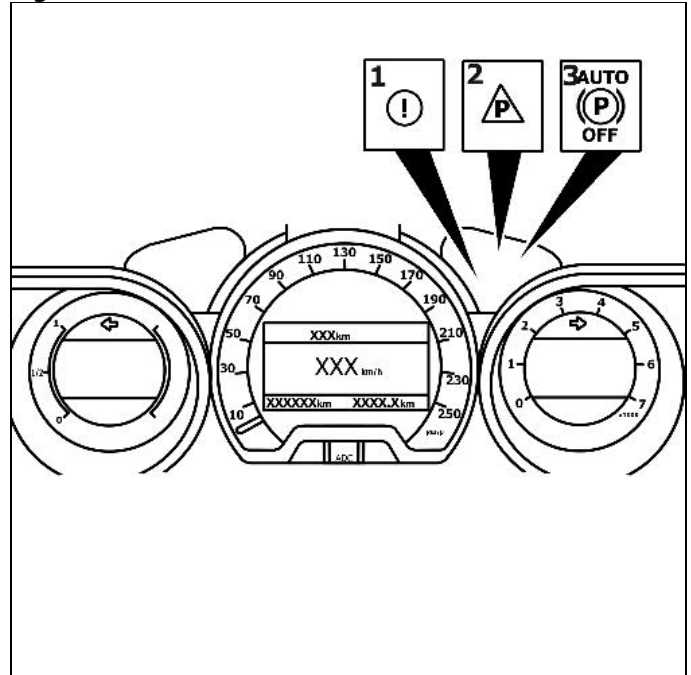

**1 Indicator light**

**2 Fault indicator light**

**3 Indicator light**

**Activate the parking brake service mode before starting to work on the brake system.**

### **Note position of EOBD connection.**

Connect diagnostic unit to diagnostic connection.  
Switch on ignition.  
Disengage parking brake

**Follow the instructions of the diagnostic unit.**

### **After repair work**

#### **Follow the instructions of the diagnostic unit.**


Carry out basic adjustments using suitable diagnostic unit.  
Check fault memory, and delete fault if necessary.

**Disconnect the battery prior to changing the brake linings.**

## **Parking brake emergency unlocking device**

Secure vehicle with wheel chocks against rolling away.  
Remove cover(s). **(1)**  
**(see figure 3)**

**Figure 3**

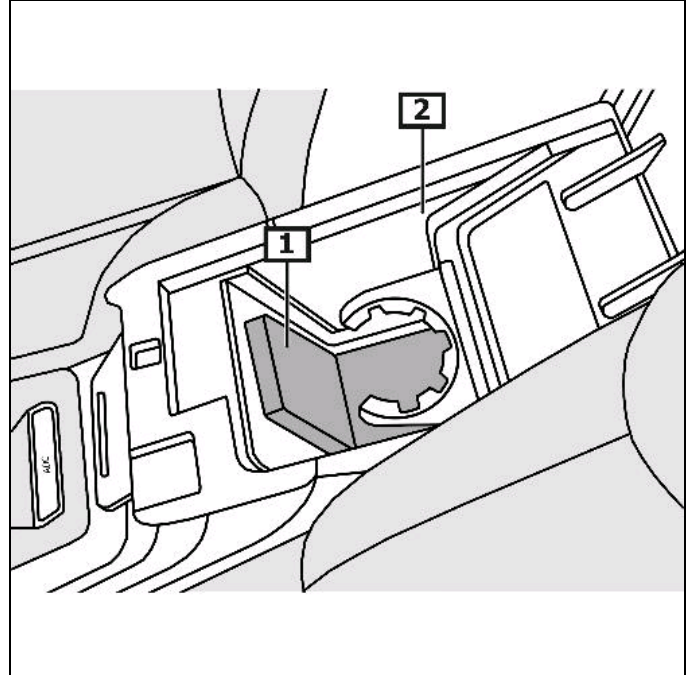


**1 Cover**

**2 Center armrest**

Pull the Bowden cable to unlock the parking brake.  
The brake unlocks audibly.  
**(see figure 4)**

**Figure 4**

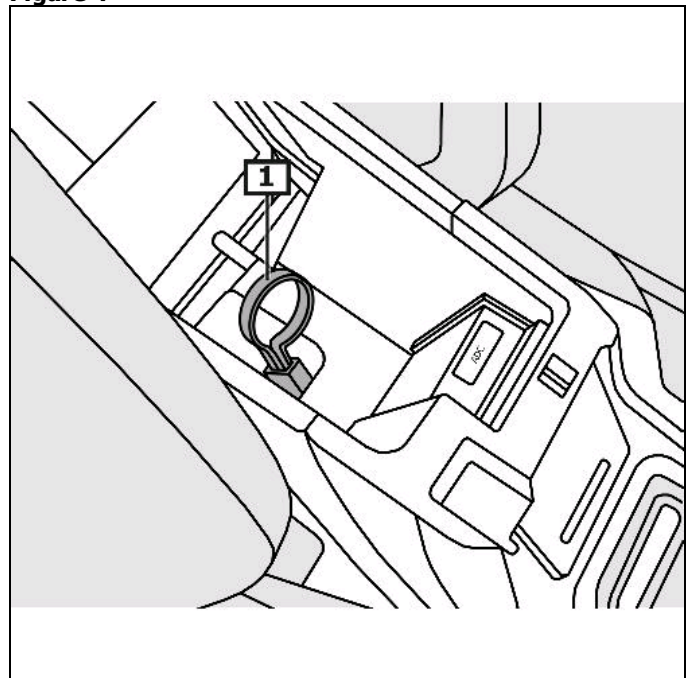

**1 Cable**