



FORD C-MAX (DM2), FOCUS C-MAX



WARNING

Health risk!

Inhalation of brake dusts may result in serious damage to the respiratory organs!

Do not clean brake components with compressed air.

Use brake cleaner fluid.

NOTE

Carry out emergency release prior to any work on the brake system.

The illustrations of these installation instructions are exemplary and are only intended for better understanding.

General reference notes


The control unit with the parking brake servomotor is located on the underbody.

The switch for the parking brake is located in the center console.

(1)

(see figure 1)

Figure 1

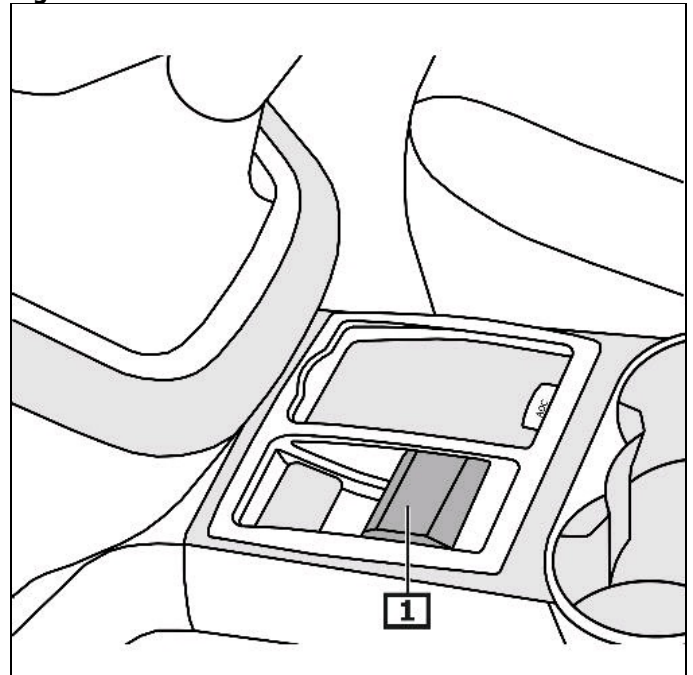

1 Parking brake switch

Display/operation

Automatic mode

The parking brake is automatically actuated after the engine has been cut with the vehicle being stationary.

Seat belt fastened.

The parking brake releases automatically as soon as the vehicle is being driven in the 1st gear or when reversing.

Engage parking brake

Pull parking brake switch.

Disengage parking brake

Press parking brake switch and simultaneously operate the clutch or brake pedal.

The red warning light goes on when errors occur that greatly impair operating or traffic safety. **(1)**

(see figure 2)

For further details and information, please refer to the operating manual!

Parking brake emergency unlocking device

Secure vehicle with wheel chocks against rolling away.

Dismantle central panel.


Remove cover(s).

Pull the Bowden cable to unlock the parking brake.

The brake unlocks audibly.

(see figure 3)

Figure 2

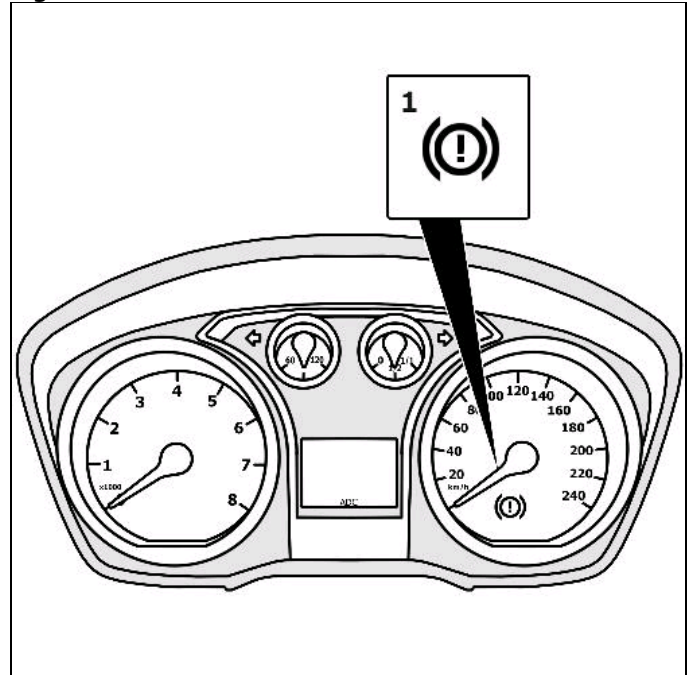

1 Fault indicator light

Figure 3

